



SDRAM SO-DIMM MODULE, 3.3V

256MByte - 32MX64

AVD6432U40A2133E0

FEATURES

INTEL PC133 Version 1.0

- Clock frequency: 133MHz with CAS latency 2 or 3
- Burst read/write and burst read/single write capability
- Data input and output masking
- Programmable burst length: 1, 2, 4, 8 and full page
- Programmable burst type: sequential and interleave
- CAS latency: 2 and 3
- Auto refresh and self refresh capability
- 8K refresh per 64ms
- 256 byte serial EEPROM
- LVTTTL-compatible inputs and outputs
- Low active and standby current consumption
- Decoupling capacitors at each memory device
- Double-sided module
- 1.25 inch height
- Gold card edge fingers


DESCRIPTION

The AVD6432U40A2133E0 is Unbuffered SDRAM SODIMM memory module. This module is based on INTEL PC133 SODIMM Version 1.0. A 256 byte serial EEPROM on board can be used to store module information such as timing, configuration, density, etc.

The AVD6432U40A2133E0 memory module is 256MByte and organized as a 32MX64 array using (8) 16MX16 (4 internal banks) SDRAMs in TSSOP II packages.

All memory modules are fabricated using the latest technology design, six-layer printed circuit board substrate construction with low ESR decoupling capacitors on-board for high reliability and low noise.

PHYSICAL DIMENSIONS

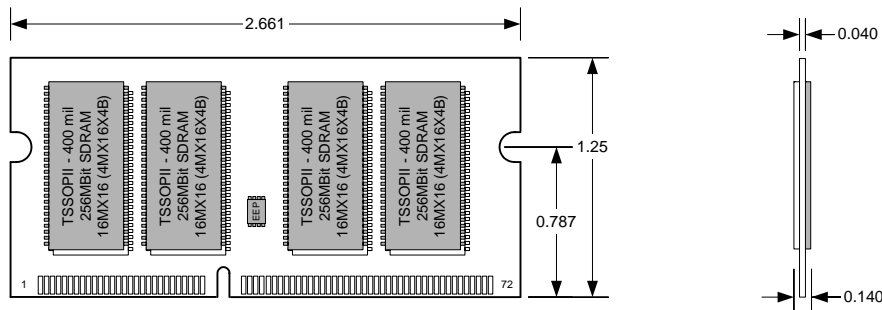

All gray ICs are on the front side of the module. And all white ICs are on the back side of the module.

TSSOP Package

Avant Ordering Guides

AV	D	64	32	U	40	A	2	133	E	0
INVENTORY	MOD. TYPE	ORG.	DENSITY	PARITY	TYPE	VOLT.	FEATURE	SPEED	MODE	REV
Av = AVANT	D = 144-PIN SODIMM	64=X64	32=32M	U=UNBUFFERED	40=16MX16x4 (8K)	A=3.3V	2=CAS LATENCY 2 OR 3	133MHz	E=SYNC	DEF=0

Other options may be available. Call for specific part number information on options not listed.



Avant™ Technology LP., reserves the right to change products or specifications without notice.