



DDR SDRAM SO-DIMM MODULE, 2.5V 128MByte - 16MX64 AVK6416U40C2266K2-AP

FEATURES

JEDEC Standard DDR 266MHz PC2100 Version 1.0, Lead Free, RoHS compliant

- Clock frequency: 133MHz with CAS latency 2
- 256 byte serial EEPROM
- Data input and output masking
- Programmable burst length: 2, 4, 8
- Programmable burst type: sequential and interleave
- Programmable CAS latency: 2
- Auto refresh and self refresh capability
- Gold card edge fingers
- 8K refresh per 64ms
- Low active and standby current consumption
- SSTL-2 compatible inputs and outputs
- Decoupling capacitors at each memory device
- Double-sided module
- 30.75mm (1.25 inch) height


DESCRIPTION

The AVK6416U40C2266K2-AP is an Unbuffered DDR SDRAM SODIMM memory module. This module is JEDEC-standard 200-pin, small-outline, dual in-line memory module. A 256 byte serial EEPROM on board can be used to store module information such as timing, configuration, density, etc.

The AVK6416U40C2266K2-AP memory module is 128MByte and organized as a 16MX64 array using (4) 16MX16 DDR SDRAMs in lead free TSSOP II packages.

All memory modules are fabricated using the latest technology design, six-layer printed circuit board substrate construction with low ESR decoupling capacitors on-board for high reliability and low noise.

PHYSICAL DIMENSIONS

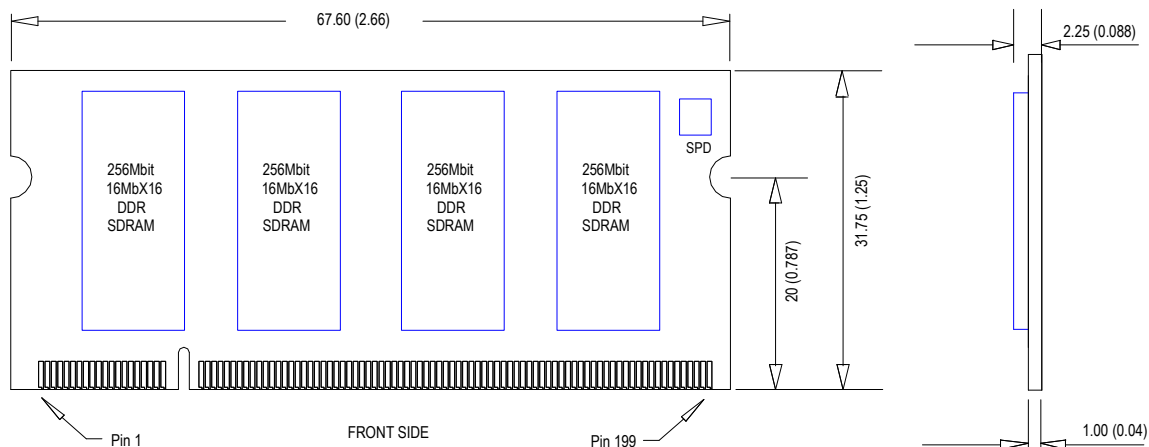

NOTES: 1- All dimensions are in millimeters (inches)
2- The dimensional drawings are for reference only. Refer to the JEDEC document for additional information.

Avant Ordering Guides

| AV | K | 64 | 16 | U | 40 | C | 2 | 266 | K | 2 |
|------------|---------------------|-----------|-----------|--------------|-------------------|----------|-------------------|------------|----------|----------|
| INVENTORY | MOD. TYPE | ORG. | DENSITY | PARITY | TYPE | VOLT. | FEATURE | SPEED | MODE | REV |
| AV = AVANT | K = 200-PIN SO-DIMM | 64 =X64 | 16 = 16M | U=UNBUFFERED | 40 = 4MX16x4 (8K) | C = 2.5V | 2 = CAS LATENCY 2 | 266MHz | K = DDR | REV=2 |

Other options may be available. Call for specific part number information on options not listed.



Avant™ Technology LP., reserves the right to change products or specifications without notice.